
KAB-EPTM1, eTOPx00 series - IDEC MICRO3, Telemecanique TSX07 & Twido, RS485

Date: February 10th, 2011

Revision: 01 Auteur: ES

KAB-EPTM1
18350
Exor eTOPx00 series serial port to IDEC MICRO3, Telemecanique TSX07 & Twido
Standard cable length 5 meters
RS485
D-sub type 9P male
Mini-DIN 8P male
Communication lines are shielded For Twido controllers: When using port 1 the DPT signal (pin 5) must be tied to GND (pin 7)



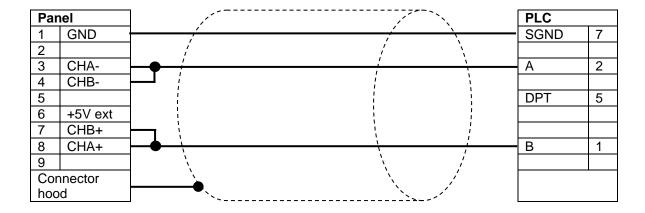

Mini-DIN 8P

The schematics in this document are drawn as accurate as possible. Most cables are tested and approved. However there are still possibilities of errors. Hiflex strongly recommends that cables are tested before use in practice. Hiflex will not be held responsible for possible errors in this document.

