


Analog Output Module (Voltage)

RIO3-AY...V, -AY...VT, -AY...VC

User Manual

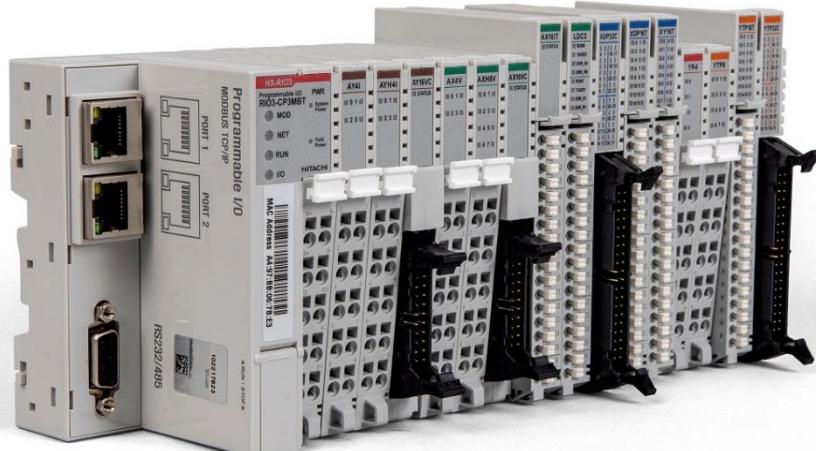

Version 1.03

DOCUMENT REVISION				
REV	PAGE	REMARKS	DATE	EDITOR
1.02		New Document	Nov 2020	(OPR), (PF)
1.02	47	Remove product list table and add a reference	Aug 2021	Faber
1.03	11,23 10,16,22,29 36	Add Parameter Bit (Setting Voltage Range: 0~5V) Specification updated	Feb 2025	Lankala

Table of Contents

1	Important Notes.....	5
1.1	Safety Instruction	6
1.1.1	Symbols	6
1.1.2	Safety Notes	6
1.1.3	Certification.....	6
2	Analog Input Module List	7
3	Specification	8
3.1	RIO3-AY4V.....	8
3.1.1	Wiring Diagram.....	8
3.1.2	LED Indicator.....	9
3.1.3	Channel Status LED.....	9
3.1.4	Environment Specification	10
3.1.5	Specification	11
3.1.6	Data Value / Voltage.....	12
3.1.7	Mapping Data form the Image Table.....	13
3.1.8	Parameter Data	13
3.2	RIO3-AYH4V	14
3.2.1	Wiring Diagram.....	14
3.2.2	LED Indicator.....	15
3.2.3	Channel Status LED.....	15
3.2.4	Environment Specification	16
3.2.5	Specification	17
3.2.6	Data Value / Voltage.....	18
3.2.7	Mapping Data from the Image Table.....	19
3.2.8	Parameter Data	19
3.3	RIO3-AY8V.....	20
3.3.1	Wiring Diagram.....	20
3.3.2	LED Indicator.....	21
3.3.3	Channel Status LED.....	21
3.3.4	Environment Specification	22
3.3.5	Specification	23

3.3.6	Data Value / Voltage.....	24
3.3.7	Mapping Data form the Image Table.....	25
3.3.8	Parameter Data	26
3.4	RIO3-AY16VC	27
3.4.1	Wiring Diagram.....	27
3.4.2	LED Indicator.....	28
3.4.3	Channel Status LED.....	28
3.4.4	Environment Specification	29
3.4.5	Specification	30
3.4.6	Data Value / Voltage.....	31
3.4.7	Mapping Data form the Image Table.....	32
3.4.8	Parameter Data	33
3.5	RIO3-AY16VT.....	34
3.5.1	Wiring Diagram.....	34
3.5.2	LED Indicator.....	35
3.5.3	Channel Status LED.....	35
3.5.4	Environment Specification	36
3.5.5	Specification	37
3.5.6	Data Value / Voltage.....	38
3.5.7	Mapping Data form the Image Table.....	39
3.5.8	Parameter Data	40
4	Dimension	41
4.1	10-Pts. Spring Type.....	41
4.2	20-Pts. Connector Type.....	42
4.3	18-Pts. Spring Type	43
5	Mounting	44
5.1	I/O Inserting and Removing Devices	44
5.2	RTB (Removable Terminal Block)	45
6	G-Bus Pin Description	46
APPENDIX A	47
A.1.	Product List.....	47
A.2.	Glossary	47

1 Important Notes

Solid state equipment has operational characteristics differing from those of electromechanical equipment.

Safety Guidelines for the Application, Installation and Maintenance of Solid-State Controls describes some important differences between solid state equipment and hard-wired electromechanical devices.

Because of this difference, and because of the wide variety of uses for solid state equipment, all persons responsible for applying this equipment must satisfy themselves that each intended application of this equipment is acceptable.

In no event will HITACHI be responsible or liable for indirect or consequential damages resulting from the use or application of this equipment.

The examples and diagrams in this manual are included solely for illustrative purposes. Because of the many variables and requirements associated with any particular installation, HITACHI cannot assume responsibility or liability for actual use based on the examples and diagrams.

Warning!

- ✓ **If you don't follow the directions, it could cause a personal injury, damage to the equipment or explosion.**
- ✓ Do not assemble the products and wire with power applied to the system. Else it may cause an electric arc, which can result into unexpected and potentially dangerous action by field devices. Arching is explosion risk in hazardous locations. Be sure that the area is non-hazardous or remove system power appropriately before assembling or wiring the modules.
- ✓ Do not touch any terminal blocks or IO modules when system is running. Else it may cause the unit to an electric shock or malfunction.
- ✓ Keep away from the strange metallic materials not related to the unit and wiring works should be controlled by the electric expert engineer. Else it may cause the unit to a fire, electric shock or malfunction.

Caution!

- ✓ **If you disobey the instructions, there may be possibility of personal injury, damage to equipment or explosion. Please follow below Instructions.**
- ✓ Check the rated voltage and terminal array before wiring. Avoid the circumstances over 50°C of temperature. Avoid placing it directly in the sunlight.
- ✓ Avoid the place under circumstances over 85% of humidity.
- ✓ Do not place Modules near by the inflammable material. Else it may cause a fire.
- ✓ Do not permit any vibration approaching it directly.
- ✓ Go through module specification carefully, ensure inputs, output connections are made with the specifications. Use standard cables for wiring.
- ✓ Use Product under pollution degree 2 environment.

1.1 Safety Instruction

1.1.1 Symbols

DANGER	 Identifies information about practices or circumstances that can cause an explosion in a hazardous environment, which may lead to personal injury or death property damage, or economic loss.
IMPORTANT	Identifies information that is critical for successful application and understanding of the product.
ATTENTION	 Identifies information about practices or circumstances that can lead to personal injury, property damage, or economic loss. Attentions help you to identify a hazard, avoid a hazard, and recognize the consequences.

1.1.2 Safety Notes

DANGER	 The modules are equipped with electronic components that may be destroyed by electrostatic discharge. When handling the modules, ensure that the environment (persons, workplace and packing) is well grounded. Avoid touching conductive components, GBUS Pin.
---------------	---

1.1.3 Certification

UL Listed Industrial Control Equipment, certified for U.S.

See UL File UL196687

CE Certificate

EN 61000-6-2; Industrial Immunity

EN 61000-6-4; Industrial Emissions

Reach, RoHS (EU, CHINA), EAC


2 Analog Input Module List

RIO3-Number	Description	ID (hex)
RIO3-AY4V	Analog Output 4 Channels, Voltage Output, 0~10V, 12Bits	4424
RIO3-AYH4V	Analog Output 4 Channels, Voltage Output, 0~10V, 16Bits	4464
RIO3-AY8V	Analog Output 8 Channels, Voltage Output, 0~10V, 12Bits	4428
RIO3-AY16VC	Analog Output 16 Channels, Voltage Output, 0~10V, 12Bits	442F
RIO3-AY16VT	Analog Output 16 Channels, Voltage Output, 0~10V, 12Bits	447F

3 Specification


3.1 RIO3-AY4V

3.1.1 Wiring Diagram

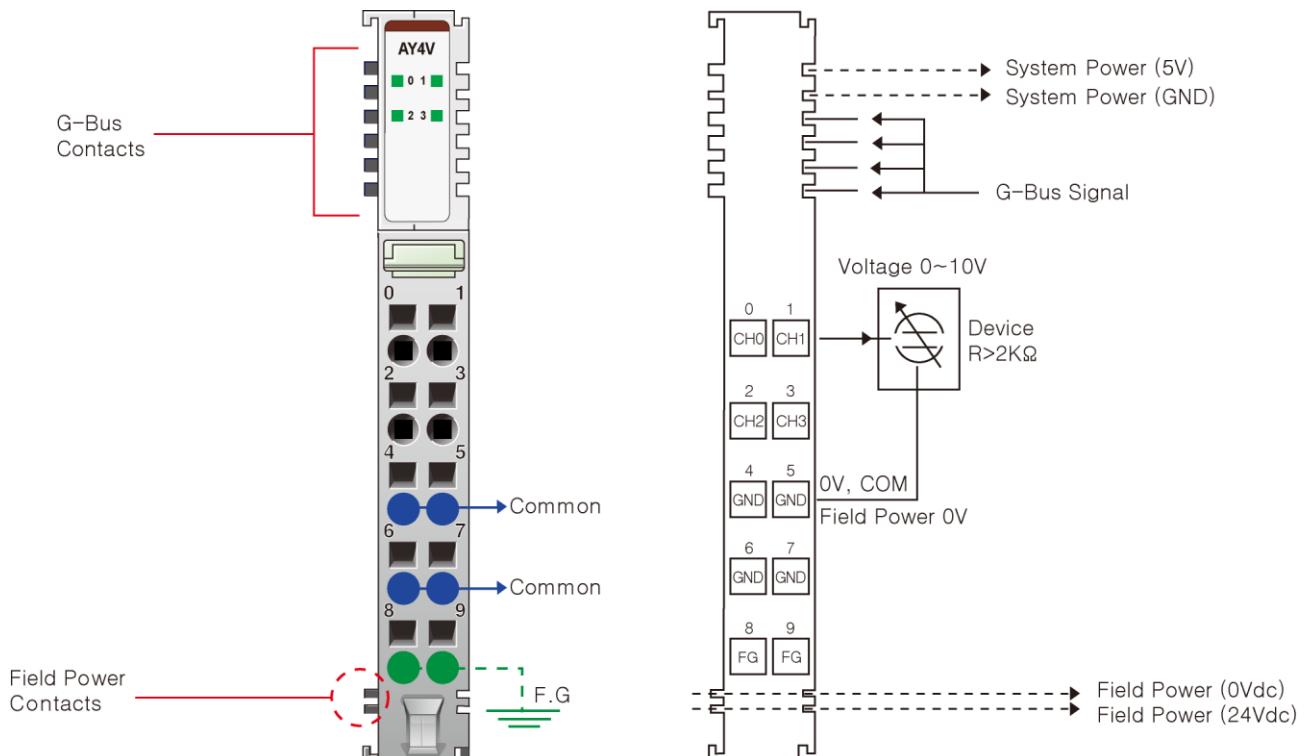

Pin No.	Signal Description	Signal Description	Pin No.
0	Analog Output Channel 0	Analog Output Channel 1	1
2	Analog Output Channel 2	Analog Output Channel 3	3
4	Output Channel Common (AGND)	Output Channel Common (AGND)	5
6	Output Channel Common (AGND)	Output Channel Common (AGND)	7
8	F.G	F.G	9

3.1.2 LED Indicator

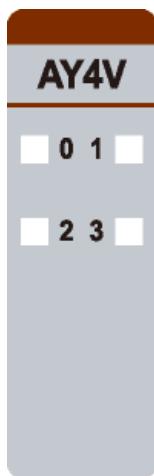

LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green

3.1.3 Channel Status LED

Status	LED	To indicate
Normal Operation	No Output Channel Off	No Output
	Output Channel	Output
Field Power Error	All Channel Repeat the Green and Off	Field Power is unconnected.

3.1.4 Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 60°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27: 2008 / 15g, 11ms
Vibration Resistance	Based on IEC 60068-2-6, 4g
Industrial Emissions	EN 61000-6-4/A11: 2011
Industrial Immunity	EN 61000-6-2: 2005
Installation Position	Vertical and horizontal installation is possible
Product Certifications	CE, UL


3.1.5 Specification

Items	Specification
Output Specification	
Outputs Per Module	4 Channels Single Ended, Non-Isolated Between Channel
Indicators (Logic side)	4 Green Output Status
Resolution in Ranges	12 bits: 2.44mV/Bit(0~10V) 12 bits: 1.22mV(0~5V)
Output Range	0 ~ 10Vdc, 0~5Vdc
Data Format	16 Bits Integer (2 ^l complement)
Module Error	±0.1% Full Scale @ 25°C ±0.3% Full Scale @ -40°C ~ 70°C
Load Resistance	Min. 2KΩ
Diagnostic	Field Power Off: LED Blinking Field Power On: No Output LED Off Field Power On: Output LED ON
Conversion Time	0.15msec / All Channel
Calibration	Not Required
Common Type	4 Common, Field Power 0V is Common (AGND)
General Specification	
Power Dissipation	Max. 30mA @ 5.0Vdc
Isolation	I/O to Logic: Isolation Field Power: Non-Isolation
UL Field Power	Supply Voltage: 24Vdc nominal, Class 2
Field Power	Supply Voltage: 24Vdc nominal Voltage Range*: 18~30Vdc Power Dissipation: Max. 35mA @ 24Vdc
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Torque	0.8Nm (7lb-in)
Weight	58g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to 'Environment Specification'

3.1.6 Data Value / Voltage

Voltage Range: 0 ~ 10V


Voltage	0.0V	2.5V	5.0V	10.0V
Data(Hex)	H0000	H03FF	H07FF	H0FFF

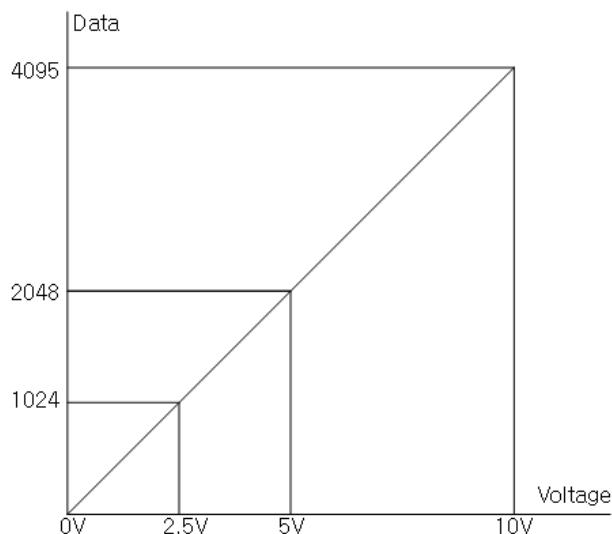

3.1.7 Mapping Data form the Image Table.

Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0					Analog Output Ch0 Low byte			
Byte 1					Analog Output Ch0 High byte			
Byte 2					Analog Output Ch1 Low byte			
Byte 3					Analog Output Ch1 High byte			
Byte 4					Analog Output Ch2 Low byte			
Byte 5					Analog Output Ch2 High byte			
Byte 6					Analog Output Ch3 Low byte			
Byte 7					Analog Output Ch3 High byte			



Output Module Data - 8byte Output Data

Analog Input Ch0
Analog Input Ch1
Analog Input Ch2
Analog Input Ch3

3.1.8 Parameter Data


Valid Parameter length: 4 Bytes

Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0						
Byte 0	Fault Action for Channel 3		Fault Action for Channel 2		Fault Action for Channel 1		Fault Action for Channel 0							
	00 : Fault Value 01 : Hold last state 10 : Low Limit 11 : high Limit													
Byte 1	Not used													
Byte 2	Fault Value Low Byte													
Byte 3	Not used			Fault Value high Byte										


3.2 RIO3-AYH4V

3.2.1 Wiring Diagram

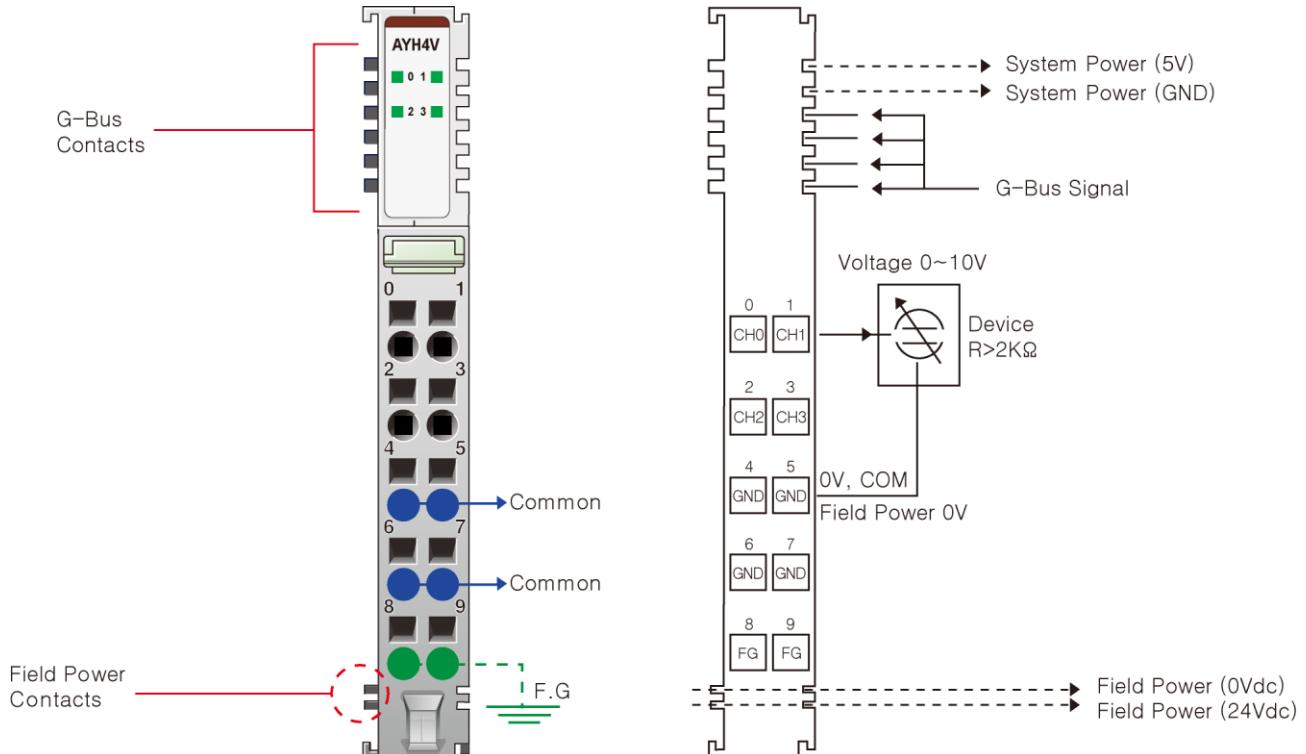

Pin No.	Signal Description	Signal Description	Pin No.
0	Analog Output Channel 0	Analog Output Channel 1	1
2	Analog Output Channel 2	Analog Output Channel 3	3
4	Output Channel Common (AGND)	Output Channel Common (AGND)	5
6	Output Channel Common (AGND)	Output Channel Common (AGND)	7
8	F.G	F.G	9

3.2.2 LED Indicator

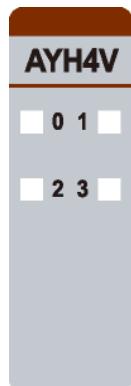

LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green

3.2.3 Channel Status LED

Status	LED	To indicate
Normal Operation	No Output Channel Off	No Output
	Output Channel Green	Output
Field Power Error	All Channel Repeat the Green and Off	Field Power is unconnected.

3.2.4 Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 60°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27: 2008 / 15g, 11ms
Vibration Resistance	Based on IEC 60068-2-6, 4g
Industrial Emissions	EN 61000-6-4/A11: 2011
Industrial Immunity	EN 61000-6-2: 2005
Installation Position	Vertical and horizontal installation
Product Certifications	CE, UL


3.2.5 Specification

Items	Specification
Output Specification	
Outputs Per Module	4 Channels Single Ended, Non-Isolated Between Channel
Indicators (Logic side)	4 Green Output Status
Resolution in Ranges	16bit (Include Sign) 15bits: 0.31mV/bit
Output Range	0 ~ 10Vdc
Data Format	16 Bits Integer (2 ^l complement)
Module Error	±0.1% Full Scale @ 25°C ±0.3% Full Scale @ -40°C ~ 70°C
Load Resistance	Min. 2kΩ
Diagnostic	Field Power Off: LED Blinking Field Power On: No Output LED Off Field Power On: Output LED ON
Conversion Time	0.15msec / All Channel
Calibration	Not Required
Common Type	4 Common, Field Power 0V is Common (AGND)
General Specification	
Power Dissipation	Max. 30mA @ 5.0Vdc
Isolation	I/O to Logic: Isolation Field Power: Non-Isolation
UL Field Power	Supply Voltage: 24Vdc nominal, Class 2
Field Power	Supply Voltage: 24Vdc nominal Voltage Range*: 18 ~ 30Vdc Power Dissipation: Max. 35mA @ 24Vdc
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Torque	0.8Nm (7lb-in)
Weight	58g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to 'Environment Specification'

3.2.6 Data Value / Voltage

Voltage Range: 0 ~ 10V


Voltage	0.0V	2.5V	5.0V	10.0V
Data(Hex)	H0000	H1FFF	H3FFF	H7FFF

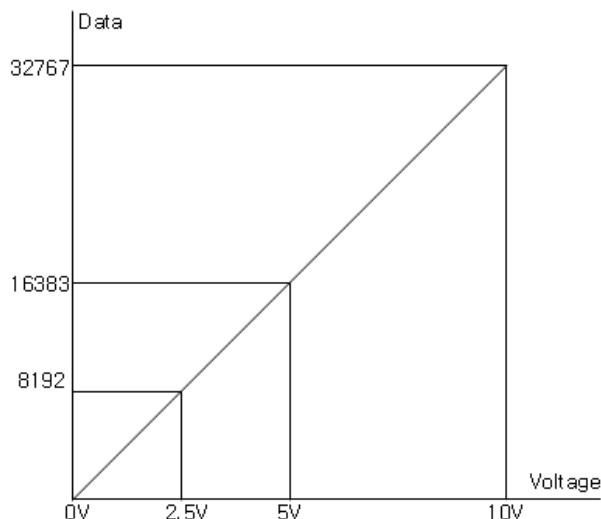

3.2.7 Mapping Data from the Image Table.

Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0					Analog Output Ch0 Low byte			
Byte 1					Analog Output Ch0 High byte			
Byte 2					Analog Output Ch1 Low byte			
Byte 3					Analog Output Ch1 High byte			
Byte 4					Analog Output Ch2 Low byte			
Byte 5					Analog Output Ch2 High byte			
Byte 6					Analog Output Ch3 Low byte			
Byte 7					Analog Output Ch3 High byte			



Output Module Data - 8byte Output Data

Analog Input Ch0
Analog Input Ch1
Analog Input Ch2
Analog Input Ch3

3.2.8 Parameter Data


Valid Parameter length: 4 Bytes

Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0						
Byte 0	Fault Action for Channel 3		Fault Action for Channel 2		Fault Action for Channel 1		Fault Action for Channel 0							
	00: Fault Value 01: Hold last state 10: Low Limit 11: high Limit													
Byte 1	Not used													
Byte 2	Fault Value Low Byte													
Byte 3	Fault Value high Byte													


3.3 RIO3-AY8V

3.3.1 Wiring Diagram

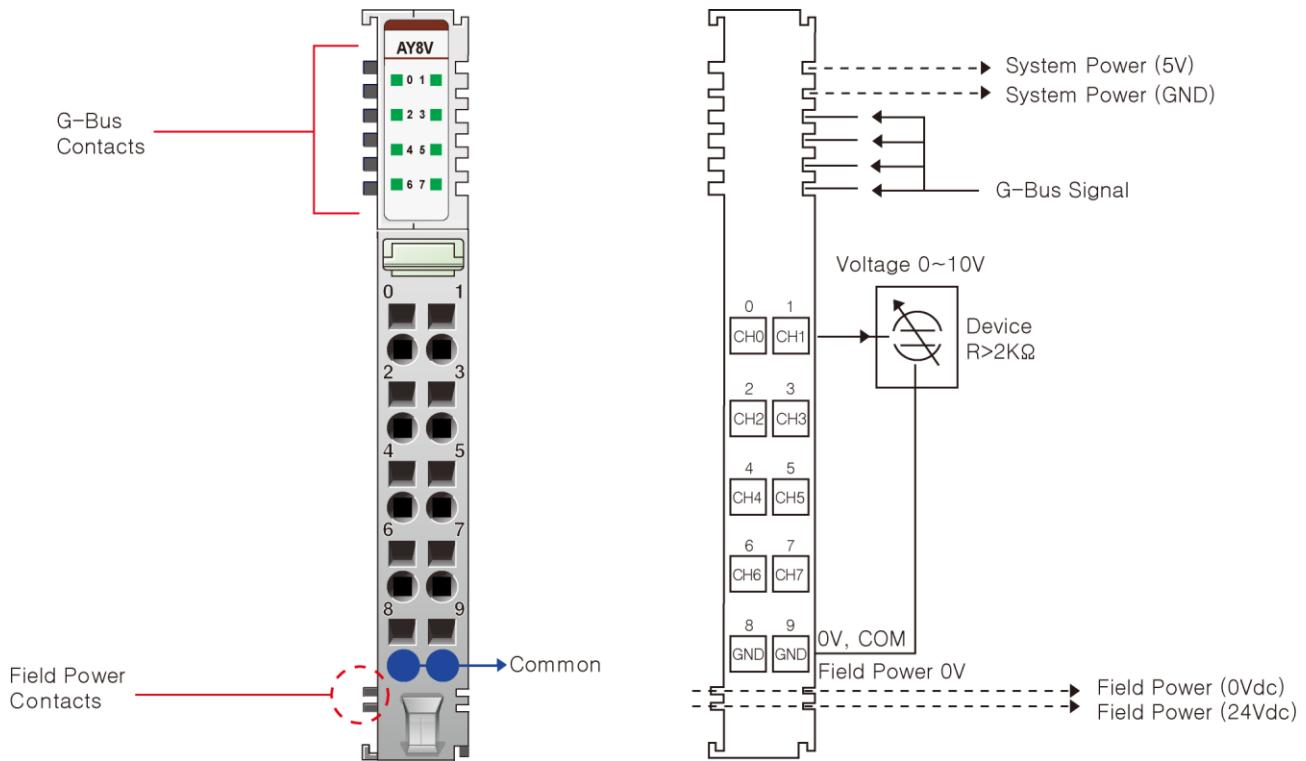

Pin No.	Signal Description	Signal Description	Pin No.
0	Analog Output Channel 0	Analog Output Channel 1	1
2	Analog Output Channel 2	Analog Output Channel 3	3
4	Analog Output Channel 4	Analog Output Channel 5	5
6	Analog Output Channel 6	Analog Output Channel 7	7
8	Output Channel Common (AGND)	Output Channel Common (AGND)	9

3.3.2 LED Indicator

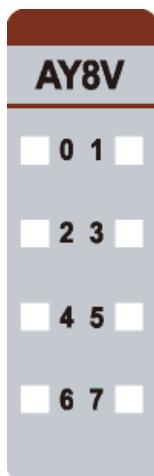

LED No.	LED Function / Description	LED Color
0	Output Channel 0	Green
1	Output Channel 1	Green
2	Output Channel 2	Green
3	Output Channel 3	Green
4	Output Channel 4	Green
5	Output Channel 5	Green
6	Output Channel 6	Green
7	Output Channel 7	Green

3.3.3 Channel Status LED

Status	LED	To indicate
Normal Operation	No Output Channel Off	No Output
	Output Channel Green	Output value
Field Power Error	All Channel Repeat the Green and Off	Field Power is unconnected.

3.3.4 Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 60°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27: 2008 / 15g, 11ms
Vibration Resistance	Based on IEC 60068-2-6, 4g
Industrial Emissions	EN 61000-6-4/A11: 2011
Industrial Immunity	EN 61000-6-2: 2005
Installation Position	Vertical and horizontal installation
Product Certifications	CE, UL


3.3.5 Specification

Items	Specification
Output Specification	
Outputs Per Module	8 Channels Single Ended, Non-Isolated Between Channel
Indicators (Logic side)	8 Green Output Status
Resolution in Ranges	12 bits: 2.44mV/Bit(0~10V) 12 bits: 1.22mV(0~5V)
Output Range	0 ~ 10Vdc, 0~5Vdc
Data Format	16 Bits Integer (2 ^l complement)
Module Error	±0.1% Full Scale @ 25°C ±0.3% Full Scale @ -40°C ~ 70°C
Load Resistance	Min. 2KΩ
Diagnostic	Field Power Off: LED Blinking Field Power On: No Output LED Off Field Power On: Output LED ON
Conversion Time	0.2msec / All Channel
Calibration	Not Required
Common Type	2 Common, Field Power 0V is Common (AGND)
General Specification	
Power Dissipation	Max. 30mA @ 5.0Vdc
Isolation	I/O to Logic: Isolation Field Power: Non-Isolation
UL Field Power	Supply Voltage: 24Vdc nominal, Class 2
Field Power	Supply Voltage: 24Vdc nominal Voltage Range: 18~30Vdc Power Dissipation: Max. 70mA @ 24Vdc
Wiring	I/O Cable Max. 2.0mm ² (AWG 14)
Torque	0.8Nm (7lb-in)
Weight	58g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to 'Environment Specification'

3.3.6 Data Value / Voltage

Voltage Range: 0 ~ 10V


Voltage	0.0V	2.5V	5.0V	10.0V
Data(Hex)	H0000	H03FF	H07FF	H0FFF

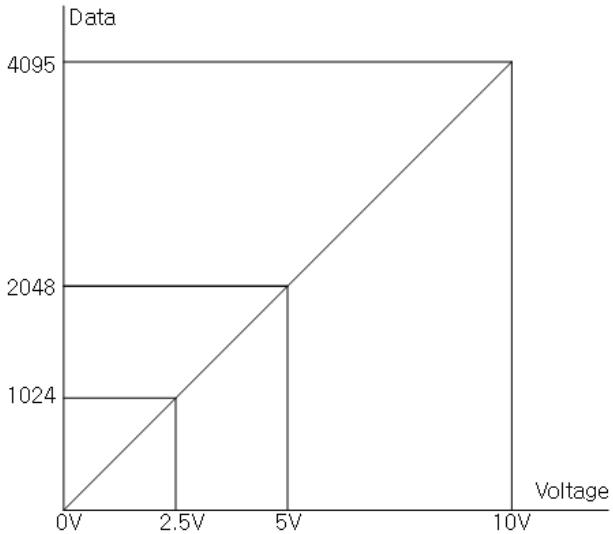

3.3.7 Mapping Data from the Image Table.

Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0					Analog Output Ch0 Low byte			
Byte 1					Analog Output Ch0 High byte			
Byte 2					Analog Output Ch1 Low byte			
Byte 3					Analog Output Ch1 High byte			
Byte 4					Analog Output Ch2 Low byte			
Byte 5					Analog Output Ch2 High byte			
Byte 6					Analog Output Ch3 Low byte			
Byte 7					Analog Output Ch3 High byte			
Byte 8					Analog Output Ch4 Low byte			
Byte 9					Analog Output Ch4 High byte			
Byte 10					Analog Output Ch5 Low byte			
Byte 11					Analog Output Ch5 High byte			
Byte 12					Analog Output Ch6 Low byte			
Byte 13					Analog Output Ch6 High byte			
Byte 14					Analog Output Ch7 Low byte			
Byte 15					Analog Output Ch7 High byte			



Output Module Data - 16byte Output Data

Analog Input Ch0
Analog Input Ch1
Analog Input Ch2
Analog Input Ch3
Analog Input Ch4
Analog Input Ch5
Analog Input Ch6
Analog Input Ch7

3.3.8 Parameter Data


Valid Parameter length: 4 Bytes

Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0	Fault Action for Channel 3		Fault Action for Channel 2		Fault Action for Channel 1		Fault Action for Channel 0	
	00: Fault Value 01: Hold last state 10: Low Limit 11: high Limit							
Byte 1	Fault Action for Channel 7		Fault Action for Channel 6		Fault Action for Channel 5		Fault Action for Channel 4	
	00: Fault Value 01: Hold last state 10: Low Limit 11: high Limit							
Byte 2	Fault Value Low Byte							
Byte 3	Not used				Fault Value high Byte			

3.4 RIO3-AY16VC

3.4.1 Wiring Diagram

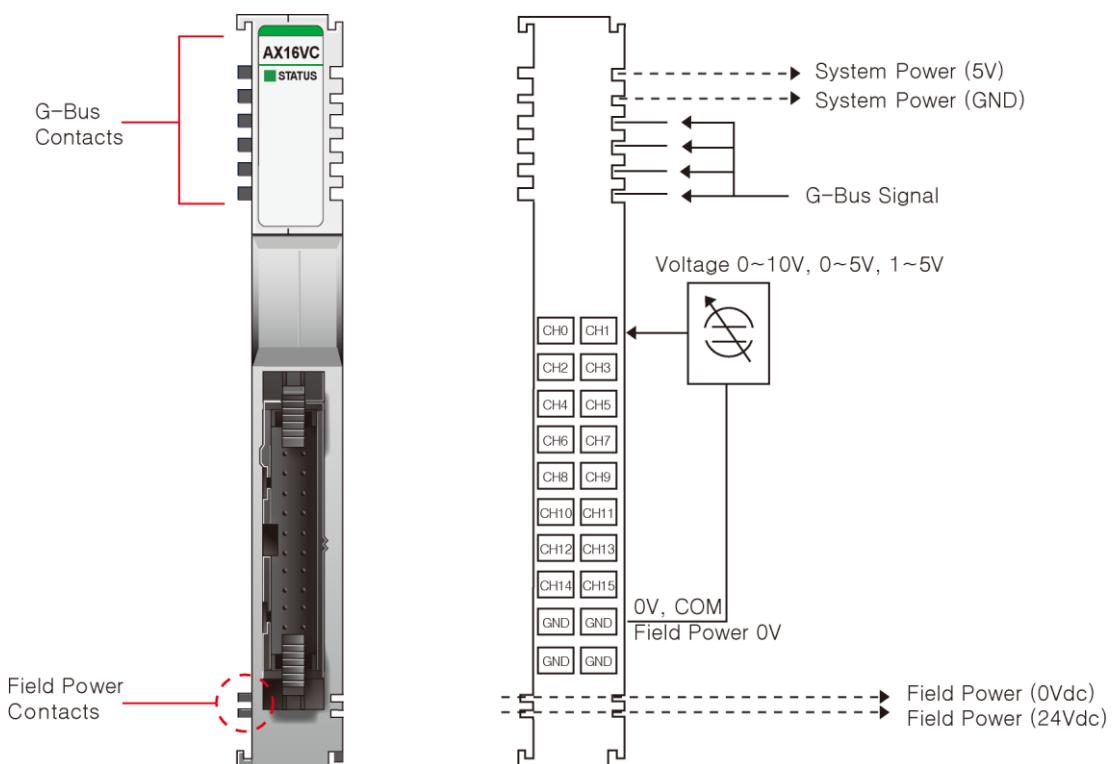

Pin No.	Signal Description	Signal Description	Pin No.
0	Analog Output Channel 0	Analog Output Channel 1	1
2	Analog Output Channel 2	Analog Output Channel 3	3
4	Analog Output Channel 4	Analog Output Channel 5	5
6	Analog Output Channel 6	Analog Output Channel 7	7
8	Analog Output Channel 8	Analog Output Channel 9	9
10	Analog Output Channel 10	Analog Output Channel 11	11
12	Analog Output Channel 12	Analog Output Channel 13	13
14	Analog Output Channel 14	Analog Output Channel 15	15
16	Output Channel Common (AGND)	Output Channel Common (AGND)	17
18	Output Channel Common (AGND)	Output Channel Common (AGND)	19

3.4.2 LED Indicator

AY16VC	STATUS	LED No.	LED Function / Description	LED Color
		0	Status LED	Green

3.4.3 Channel Status LED

Status	LED	To indicate
G-Bus Status	Off	Disconnection
	Green	Connection
Field Power Error	All Channel Repeat the Green and Off	Field Power is unconnected.

3.4.4 Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 60°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27: 2008 / 15g, 11ms
Vibration Resistance	Based on IEC 60068-2-6, 4g
Industrial Emissions	EN 61000-6-4/A11: 2011
Industrial Immunity	EN 61000-6-2: 2005
Installation Position	Vertical and horizontal installation
Product Certifications	CE, UL


3.4.5 Specification

Items	Specification
Output Specification	
Outputs Per Module	16 Channels Single Ended, Non-Isolated Between Channel
Indicators (Logic side)	1 Green G-Bus Status
Resolution in Ranges	12 Bit: 2.44mV/Bit
Output Range	0~10Vdc
Data Format	16 Bits Integer (2' complement)
Module Error	±0.1% Full Scale @ 25°C ±0.3% Full Scale @ -40°C ~ 60°C
Load Resistance	Min. 2kΩ
Diagnostic	Diagnostic Field Power Off: LED Blinking
Conversion Time	0.4msec / All Channel
Calibration	Not Required
Common Type	4 Common, Field Power 0V is Common (AGND)
General Specification	
Power Dissipation	Max. 30mA @ 5.0Vdc
Isolation	I/O to Logic: Isolation Field Power: Non-Isolation
UL Field Power	Supply Voltage: 24Vdc nominal, Class 2
Field Power	Supply Voltage: 24Vdc nominal Voltage Range: 18~26.4Vdc Power Dissipation: Max. 120mA @ 24Vdc, Load (2K)
Wiring	Connector Type, up to AWG22 Module Connector: HIF3BA-20D-2.54DSA
Weight	58g
Module Size	12mm x 99mm x 70mm
Environment Condition	Refer to 'Environment Specification'

3.4.6 Data Value / Voltage

Voltage Range: 0 ~ 10V


Voltage	0.0V	2.5V	5.0V	10.0V
Data(Hex)	H0000	H03FF	H07FF	H0FFF

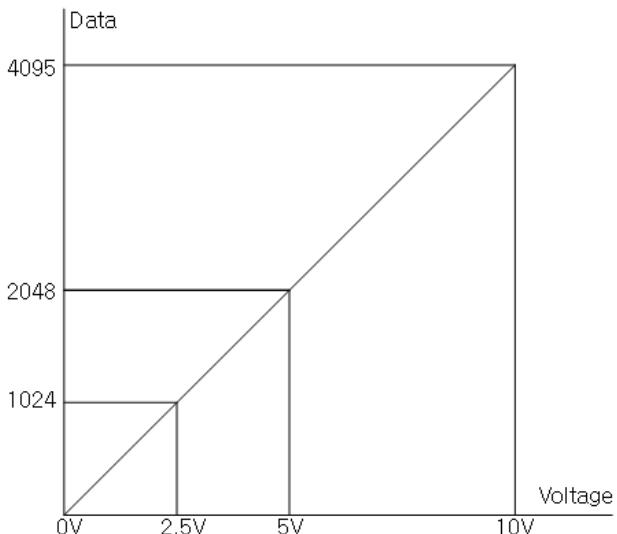

3.4.7 Mapping Data form the Image Table.

Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0					Analog Output Ch0 Low byte			
Byte 1					Analog Output Ch0 High byte			
Byte 2					Analog Output Ch1 Low byte			
Byte 3					Analog Output Ch1 High byte			
Byte 4					Analog Output Ch2 Low byte			
Byte 5					Analog Output Ch2 High byte			
Byte 6					Analog Output Ch3 Low byte			
Byte 7					Analog Output Ch3 High byte			
Byte 8					Analog Output Ch4 Low byte			
Byte 9					Analog Output Ch4 High byte			
Byte 10					Analog Output Ch5 Low byte			
Byte 11					Analog Output Ch5 High byte			
Byte 12					Analog Output Ch6 Low byte			
Byte 13					Analog Output Ch6 High byte			
Byte 14					Analog Output Ch7 Low byte			
Byte 15					Analog Output Ch7 High byte			
Byte 16					Analog Output Ch8 Low byte			
Byte 17					Analog Output Ch8 High byte			
Byte 18					Analog Output Ch9 Low byte			
Byte 19					Analog Output Ch9 High byte			
Byte 20					Analog Output Ch10 Low byte			
Byte 21					Analog Output Ch10 High byte			
Byte 22					Analog Output Ch11 Low byte			
Byte 23					Analog Output Ch11 High byte			
Byte 24					Analog Output Ch12 Low byte			
Byte 25					Analog Output Ch12 High byte			
Byte 26					Analog Output Ch13 Low byte			
Byte 27					Analog Output Ch13 High byte			
Byte 28					Analog Output Ch14 Low byte			
Byte 29					Analog Output Ch14 High byte			
Byte 30					Analog Output Ch15 Low byte			
Byte 31					Analog Output Ch15 High byte			



Output Module Data - 32byte Output Data

Analog Input Ch0
Analog Input Ch1
Analog Input Ch2
Analog Input Ch3
Analog Input Ch4
Analog Input Ch5
Analog Input Ch6
Analog Input Ch7
Analog Input Ch8
Analog Input Ch9
Analog Input Ch10
Analog Input Ch11
Analog Input Ch12
Analog Input Ch13
Analog Input Ch14
Analog Input Ch15

3.4.8 Parameter Data


Valid Parameter length: 6 Bytes

Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0	Fault Action for Channel 3		Fault Action for Channel 2		Fault Action for Channel 1		Fault Action for Channel 0	
	00: Fault Value	01: Hold last state	10: Low Limit	11: high Limit				
Byte 1	Fault Action for Channel 7		Fault Action for Channel 6		Fault Action for Channel 5		Fault Action for Channel 4	
	00: Fault Value	01: Hold last state	10: Low Limit	11: high Limit				
Byte 2	Fault Action for Channel 11		Fault Action for Channel 10		Fault Action for Channel 9		Fault Action for Channel 8	
	00: Fault Value	01: Hold last state	10: Low Limit	11: high Limit				
Byte 3	Fault Action for Channel 15		Fault Action for Channel 14		Fault Action for Channel 13		Fault Action for Channel 12	
	00: Fault Value	01: Hold last state	10: Low Limit	11: high Limit				
Byte 4			Fault Value Low Byte					
Byte 5		Not used			Fault Value high Byte			

3.5 RIO3-AY16VT


3.5.1 Wiring Diagram

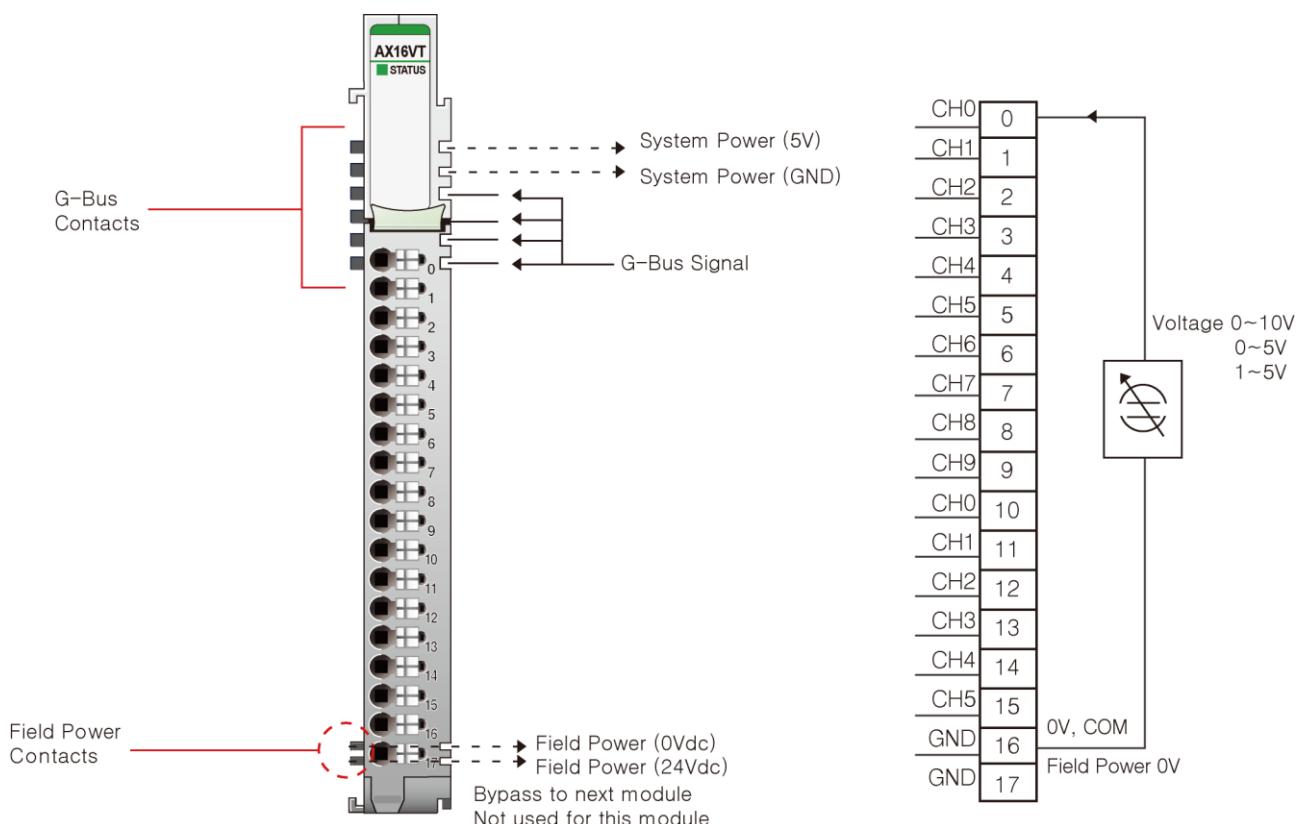

Pin No.	Signal Description
0	Analog Output Channel 0
1	Analog Output Channel 1
2	Analog Output Channel 2
3	Analog Output Channel 3
4	Analog Output Channel 4
5	Analog Output Channel 5
6	Analog Output Channel 6
7	Analog Output Channel 7
8	Analog Output Channel 8
9	Analog Output Channel 9
10	Analog Output Channel 10
11	Analog Output Channel 11
12	Analog Output Channel 12

13	Analog Output Channel 13
14	Analog Output Channel 14
15	Analog Output Channel 15
16	Output Channel Common (AGND)
17	Output Channel Common (AGND)

3.5.2 LED Indicator

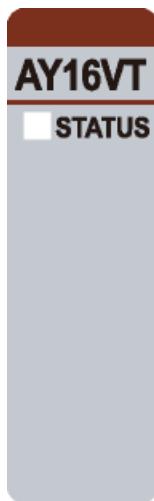

LED No.	LED Function / Description	LED Color
0	Status LED	Green

3.5.3 Channel Status LED

Status	LED	To indicate
G-Bus Status	Off	Disconnection
	Green	Connection
Field Power Error	All Channel Repeat Green and Off	Field Power is unconnected.

3.5.4 Environment Specification

Environmental Specification	
Operation Temperature	-40°C ~ 60°C
UL Temperature	-20°C ~ 60°C
Storage Temperature	-40°C ~ 85°C
Relative Humidity	5% ~ 90% non-condensing
Mounting	DIN Rail
General Specification	
Shock Operating	IEC 60068-2-27: 2008 / 15g, 11ms
Vibration Resistance	Based on IEC 60068-2-6, 4g
Industrial Emissions	EN61000-6-4/A11: 2011
Industrial Immunity	EN 61000-6-2: 2005
Installation Position	Vertical and horizontal installation
Product Certifications	CE, UL


3.5.5 Specification

Items	Specification
Output Specification	
Outputs Per Module	16 Channels Single Ended, Non-Isolated Between Channel
Indicators (Logic side)	1 Green G-Bus Status
Resolution in Ranges	12 Bits: 2.44mV/Bit
Output Range	0~10Vdc
Data Format	16 Bits Integer (2 ^l complement)
Module Error	±0.1% Full Scale @ 25°C ±0.3% Full Scale @ -40°C ~ 60°C
Load Resistance	Min. 2kΩ
Diagnostic	Field Power Off: LED Blinking
Conversion Time	0.4msec / All Channel
Calibration	Not Required
Common Type	2 Common, Field Power 0V is Common (AGND)
General Specification	
Power Dissipation	Max. 30mA @ 5.0Vdc
Isolation	I/O to Logic: Isolation Field Power: Non-Isolation
UL Field Power	Supply Voltage: 24Vdc nominal, Class 2
Field Power	Supply Voltage: 24Vdc nominal Voltage Range: 18 ~ 30Vdc Power Dissipation: Max. 150mA @ 24Vdc, Load (2K)
Wiring	Connector Type, up to AWG22 Module Connector: HIF3BA-20D-2.54DSA
Weight	63g
Module Size	12mm x 109mm x 70mm
Environment Condition	Refer to 'Environment Specification'

3.5.6 Data Value / Voltage

Voltage Range: 0 ~ 10V


Voltage	0.0V	2.5V	5.0V	10.0V
Data(Hex)	H0000	H03FF	H07FF	H0FFF

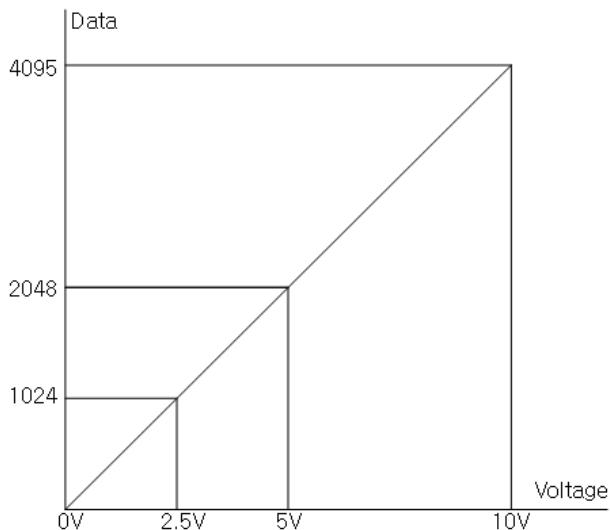

3.5.7 Mapping Data form the Image Table.

Output Image Value

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0					Analog Output Ch0 Low byte			
Byte 1					Analog Output Ch0 High byte			
Byte 2					Analog Output Ch1 Low byte			
Byte 3					Analog Output Ch1 High byte			
Byte 4					Analog Output Ch2 Low byte			
Byte 5					Analog Output Ch2 High byte			
Byte 6					Analog Output Ch3 Low byte			
Byte 7					Analog Output Ch3 High byte			
Byte 8					Analog Output Ch4 Low byte			
Byte 9					Analog Output Ch4 High byte			
Byte 10					Analog Output Ch5 Low byte			
Byte 11					Analog Output Ch5 High byte			
Byte 12					Analog Output Ch6 Low byte			
Byte 13					Analog Output Ch6 High byte			
Byte 14					Analog Output Ch7 Low byte			
Byte 15					Analog Output Ch7 High byte			
Byte 16					Analog Output Ch8 Low byte			
Byte 17					Analog Output Ch8 High byte			
Byte 18					Analog Output Ch9 Low byte			
Byte 19					Analog Output Ch9 High byte			
Byte 20					Analog Output Ch10 Low byte			
Byte 21					Analog Output Ch10 High byte			
Byte 22					Analog Output Ch11 Low byte			
Byte 23					Analog Output Ch11 High byte			
Byte 24					Analog Output Ch12 Low byte			
Byte 25					Analog Output Ch12 High byte			
Byte 26					Analog Output Ch13 Low byte			
Byte 27					Analog Output Ch13 High byte			
Byte 28					Analog Output Ch14 Low byte			
Byte 29					Analog Output Ch14 High byte			
Byte 30					Analog Output Ch15 Low byte			
Byte 31					Analog Output Ch15 High byte			



Output Module Data - 32byte Output Data

Analog Input Ch0
Analog Input Ch1
Analog Input Ch2
Analog Input Ch3
Analog Input Ch4
Analog Input Ch5
Analog Input Ch6
Analog Input Ch7
Analog Input Ch8
Analog Input Ch9
Analog Input Ch10
Analog Input Ch11
Analog Input Ch12
Analog Input Ch13
Analog Input Ch14
Analog Input Ch15

3.5.8 Parameter Data




Valid Parameter length: 6 Bytes

Parameter Data

Bit No	Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
Byte 0	Fault Action for Channel 3		Fault Action for Channel 2		Fault Action for Channel 1		Fault Action for Channel 0	
	00: Fault Value 01: Hold last state			10: Low Limit 11: high Limit				
Byte 1	Fault Action for Channel 7		Fault Action for Channel 6		Fault Action for Channel 5		Fault Action for Channel 4	
	00: Fault Value 01: Hold last state			10: Low Limit 11: high Limit				
Byte 2	Fault Action for Channel 11		Fault Action for Channel 10		Fault Action for Channel 9		Fault Action for Channel 8	
	00: Fault Value 01: Hold last state			10: Low Limit 11: high Limit				
Byte 3	Fault Action for Channel 15		Fault Action for Channel 14		Fault Action for Channel 13		Fault Action for Channel 12	
	00: Fault Value 01: Hold last state			10: Low Limit 11: high Limit				
Byte 4	Fault Value Low Byte							
Byte 5	Not used			Fault Value high Byte				


4 Dimension

4.1 10-Pts. Spring Type

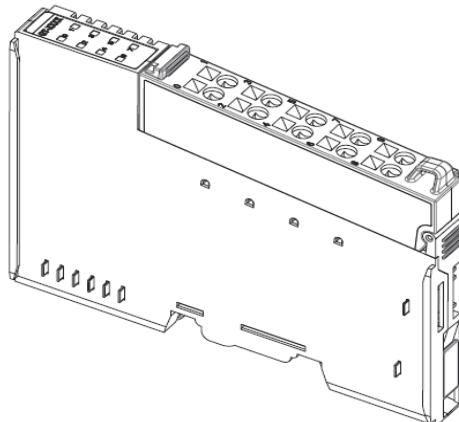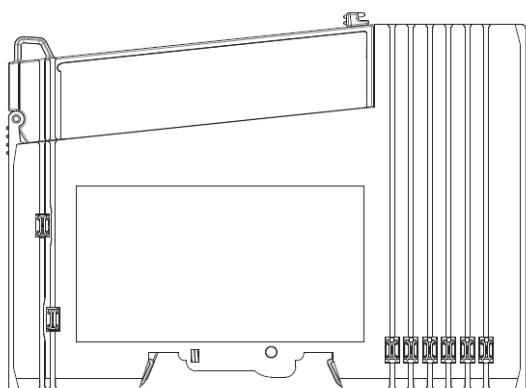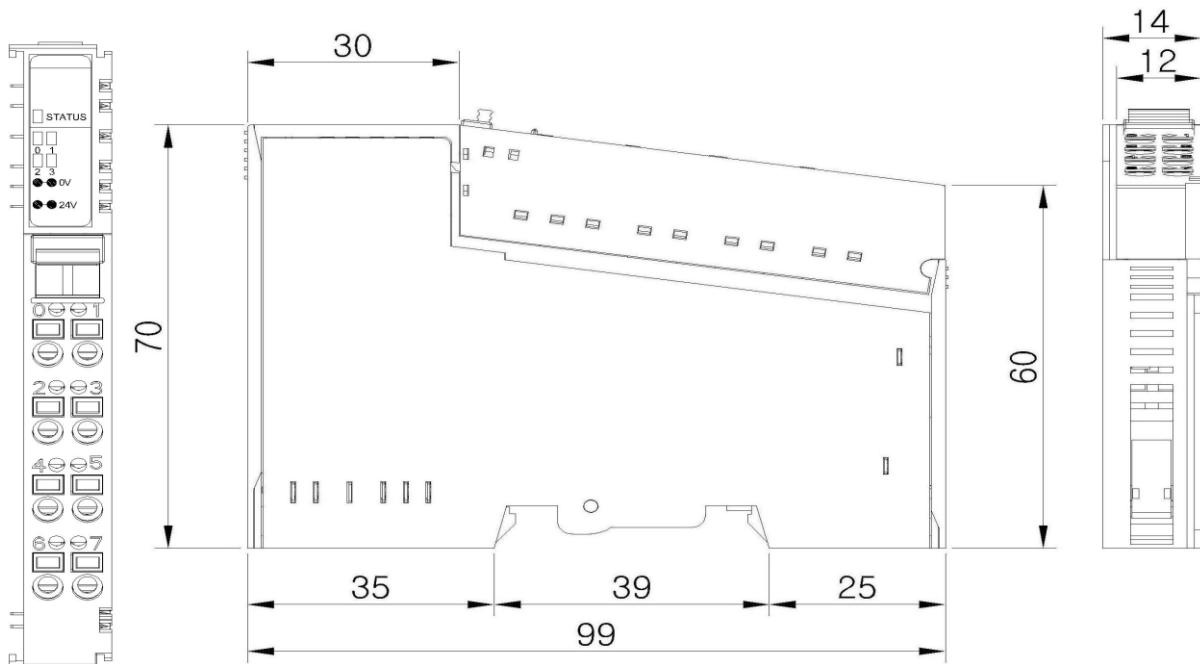


Dimensions in mm

4.2 20-Pts. Connector Type

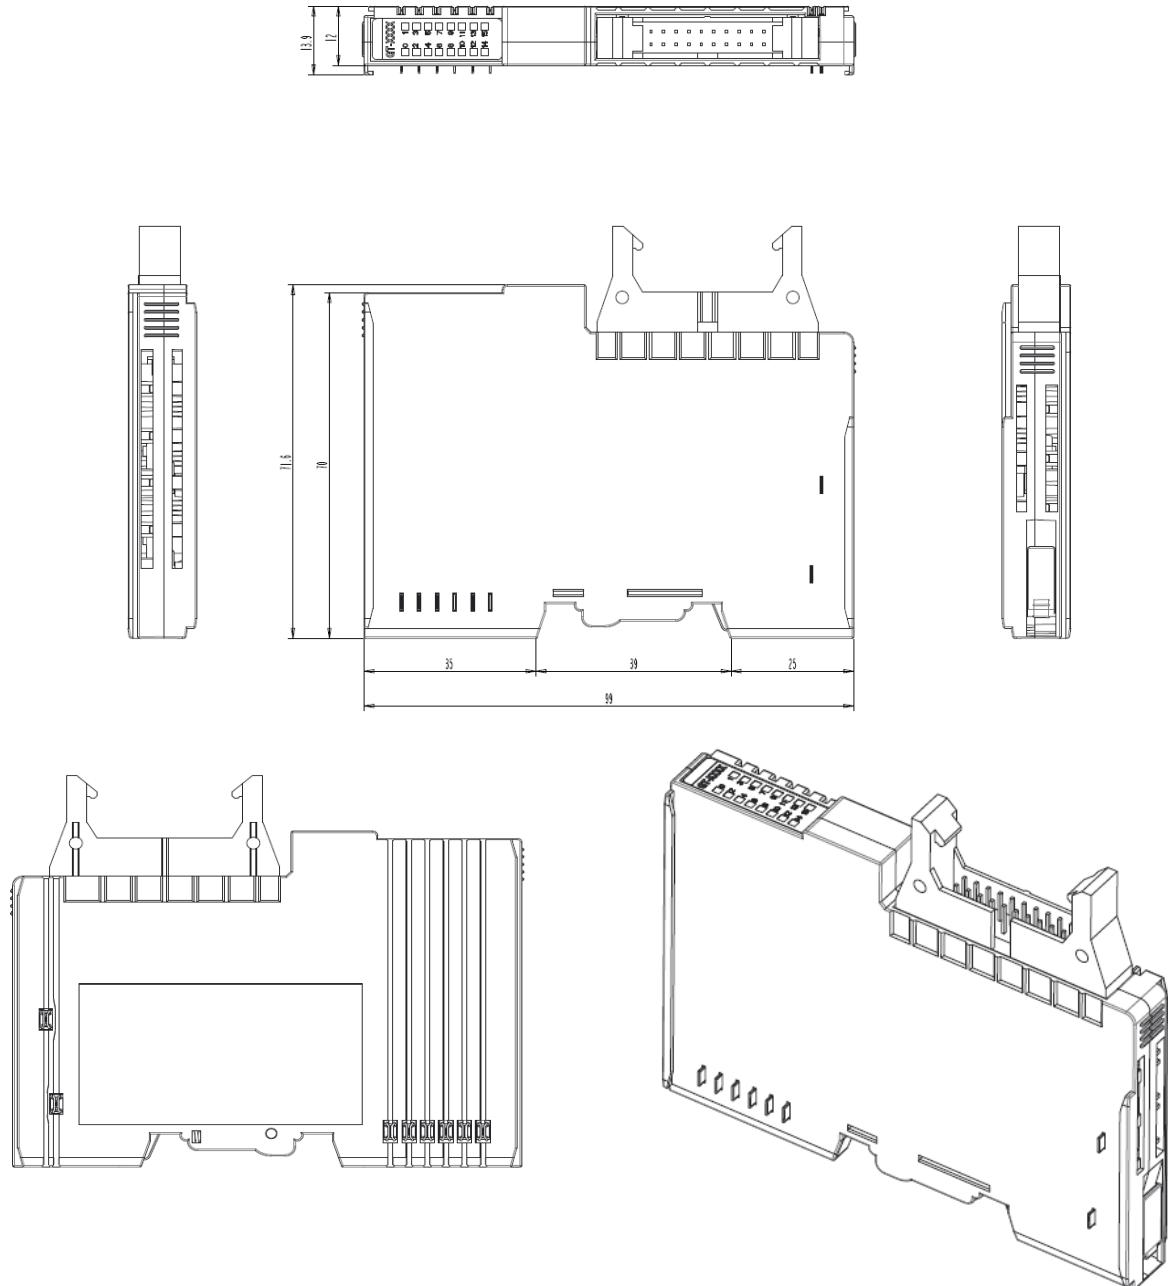

Dimensions in mm

4.3 18-Pts. Spring Type

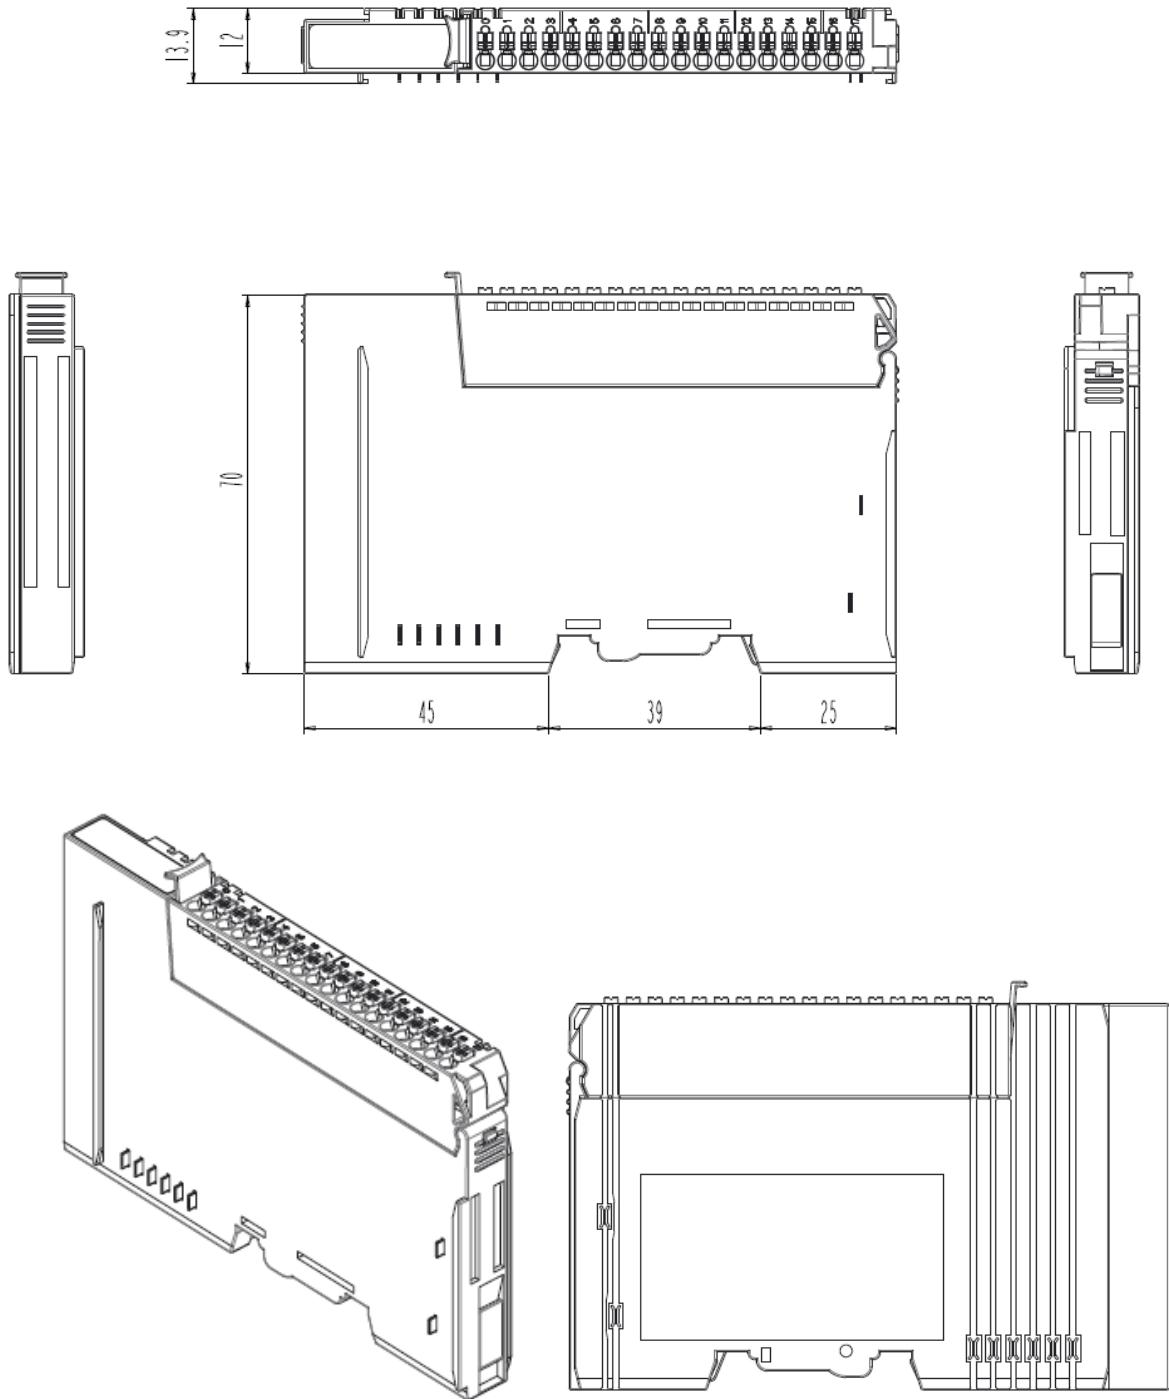

Dimensions in mm

5 Mounting

Caution!

Hot surface!


The surface of the housing can become hot during operation. If the device was operated at high ambient temperatures, allow it to be cool before touching it.

Notice!

Perform work on devices only if they are de-energized!

Working on energized devices can damage them. Therefore, turn off the power supply before working on the devices.


5.1 I/O Inserting and Removing Devices

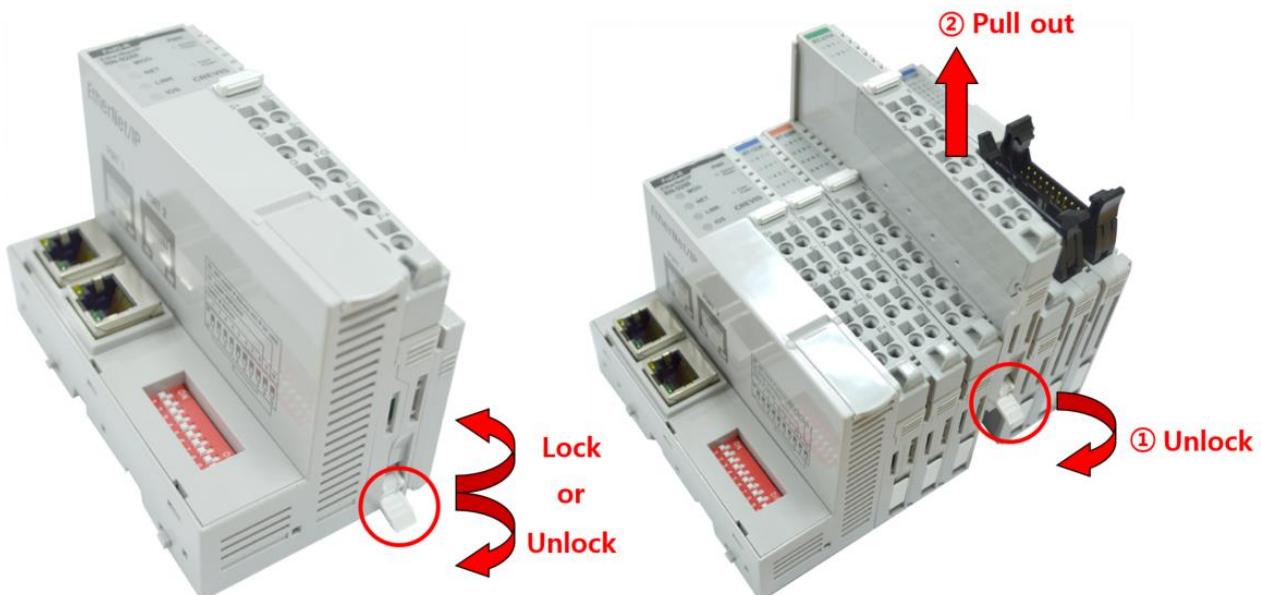

As above figure in order to safeguard the RIO3 module from jamming, it should be fixed onto the DIN rail with locking lever. To do so, fold on the upper of the locking lever.

To pull out the HX-RIO3 module, unfold the locking lever as below figure.

5.2 RTB (Removable Terminal Block)

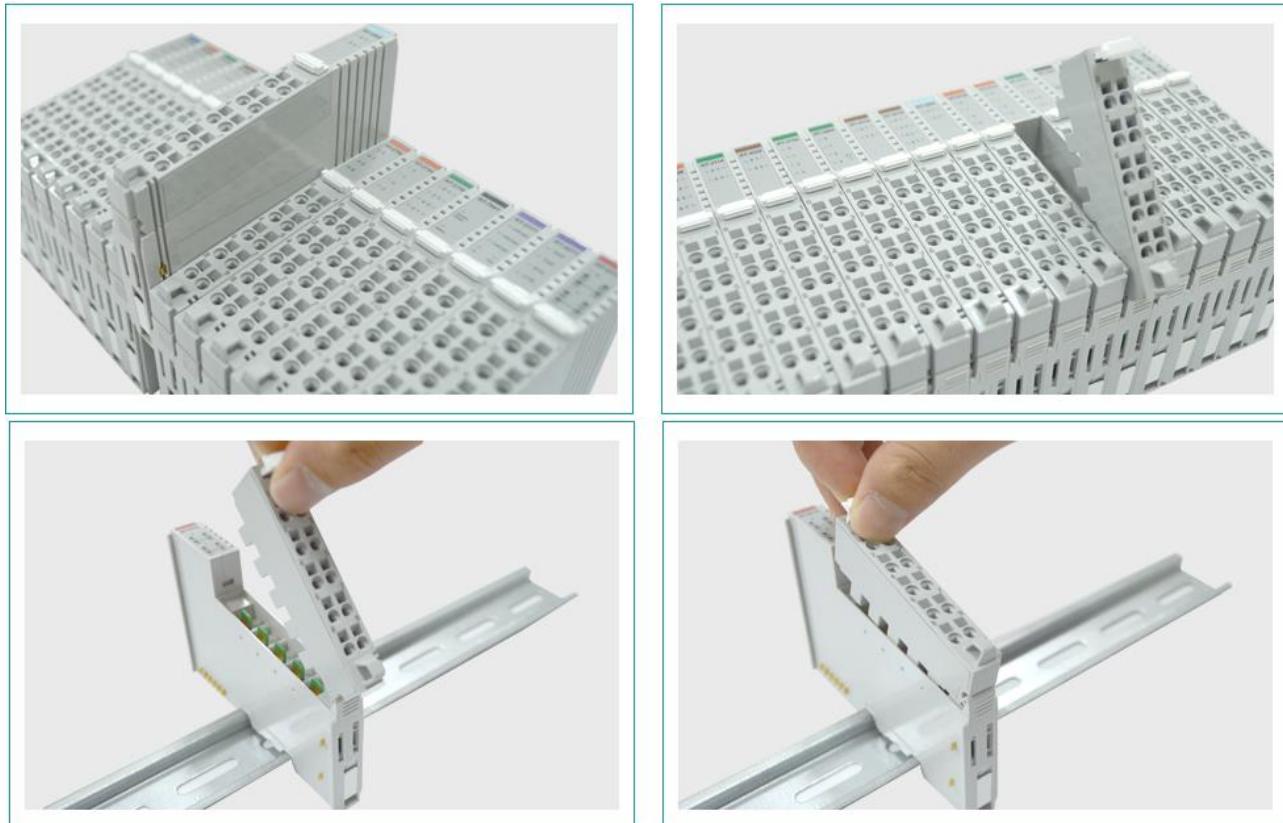

Whole terminal block can be combined and removed for the convenience.

There is a locking switch on the RTB for the easy combination and easy removal.

Easy combination and easy removal for IO modules on the din rail through One Touch Locking Switch.

6 G-Bus Pin Description

Communication between the Network Adapter and the expansion module as well as system / field power supply of the bus modules is carried out via the internal bus. It is comprised of 6 data pin and 2 field power pin.



*Please refer to the table below regarding the pin description from P1 to P8.

No.	Description
P1	System Power (VCC)
P2	System Power (GND)
P3	GBUS TX +
P4	GBUS TX -
P5	GBUS RX +
P6	GBUS RX -
P7	Field Power (GND)
P8	Field Power (VCC)

DANGER



Do not touch data and field power pins in order to avoid soiling and damage by ESD noise.

APPENDIX A

A.1. Product List

Please refer the separate HX-RIO3 product list document

A.2. Glossary

System Power: The power for starting up CPU.

Field Power: The power for input and output line.

Terminator Resistor: Resistor for prevention reflected wave.

EDS: Electronic Data Sheet.

Sink: The method of in/output power supply if a device has no power source.

Source: The method of in/output power supply if a device has the power source.