

# eCCF300 - Technical Data



## CPU Support

- Support 6th generation Intel® Core™ i7/i5/i3 LGA socket type processors
  - Core™ i7-6700TE, Quad Core, 2.4GHz, 8M Cache (maximum frequency 3.4GHz if turbo boost enabled)
  - Core™ i5-6500TE, Quad Core, 2.3GHz, 6M Cache (maximum frequency 3.3GHz if turbo boost enabled)
  - Core™ i3-6100TE, Quad Core, 2.7GHz, 4M Cache (no turbo boost)
  - Pentium G4400TE, Dual Core, 2.4GHz, 3M Cache (no turbo boost)
  - Celeron® G3900TE, Dual Core, 2.3GHz, 2M Cache (no turbo boost)

## Main Memory

- 2 x DDR4 SO-DIMM socket, supports 2133MHz and up to 8GB with un-buffered and non-ECC type

## Display Option

- Dual independent display -HDMI + DVI-D

## Front I/O Interface Status LEDs

- 1 x Battery/1 x C-Fast LEDs
- 4 x GPO status/2 x Tx/Rx LEDs
- 1 x Power/1 x HDD access LEDs

## Front I/O Interface

- 1 x ATX power on/off switch
- 1 x HDMI and 1 x DVI-D
- 4 x USB 3.0 ports (900mA per each)
- 2 x USB 2.0 ports (500mA per each)
- 1 x Line-out and 1 x Mic-in
- 2 x Antenna holes for WI-FI/ GSM
- 1 x Front access 2.5" HDD tray
- 1 x mini-PCIe expansion support optional modules
- 2 x RS232/422/485 auto with 2.5KV Isolation
- 3 x Intel® I210IT GbE LAN ports, support WoL, teaming and PXE

## Top I/O Interface

- 1 x 3-pin remote switch
- 1 x CFast expansion
- 1 x SIM card

## Storage Device

- 1 x CFast (SATA 3.0)
- 1 x 2.5" HDD (external, SATA 3.0)
- 1 x 2.5" HDD (internal, SATA 3.0)
- 1 x mSATA (via internal mini-PCIe socket)

## Expansion Slot

- eCCF300: no expansion
- Power Requirement
  - AT/ ATX power mode (default with ATX power mode)
  - Power input: typical +24VDC ±20%, with reverse polarity protection
  - Power adapter: optional AC to DC power adapter (+24VDC, 120W)

## Dimensions

- eCCF300: 90 mm(W) x 185mm (D) x 251mm (H)

## Construction

- Aluminum and metal chassis with front access design

## Environment


- Operating temperature: Ambient with air flow: -5°C to 55°C (according to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C to 85°C
- Relative humidity: 10% to 93% (non-condensing)
- Shock protection:
  - HDD: 20G, half sine, 11ms, IEC60068-27
  - CFast: 50G, half sine, 11ms, IEC60068-27
- Vibration protection w/ HDD condition:
  - Random: 0.5Grms @ 5~500 Hz, IEC60068-2-64
  - Sinusoidal: 0.5Grms @ 5~500 Hz, IEC60068-2-64

## Certifications

- CE approval
  - EN61000-6-2
  - EN61000-6-4
- FCC Class A
- LVD

## OS Support Lists

- Windows 7 PRO, 32bit/64bit
- Windows Embedded Standard 7, 32bit/64bit
- Windows 10 IoT, 32bit/64bit

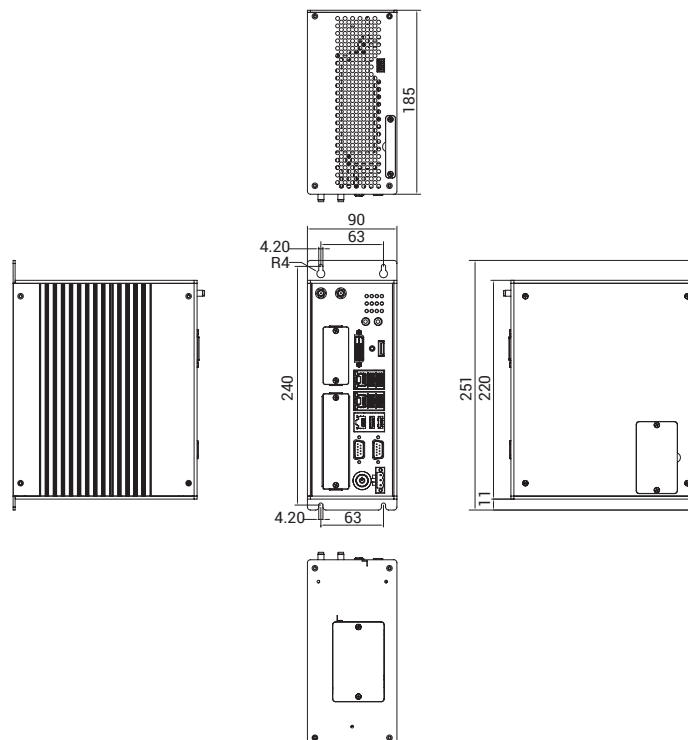

## Ordering Information

Model	Part Number	Description
eCCF300	+70ECCF300	6th Generation Intel® Core™ i7/i5/i3 LGA Automation System