

Z109S-DI

GALVANIC ISOLATOR FOR CURRENT LOOP WITH HIGH ISOLATION




- Isolation 3.500 Vac (3 way)
- Lightning impulse withstand voltage 6,5 kV
- Input/Output: 0..20, 4..20 mA
- Sensor supply 2 wire technique (max 20 mA)
- Dimension 100x 112 x 18 mm (l x h x w)
- Fast mounting on DIN rail 46277
- Enclosure PBT, black color



Z109S-DI

GALVANIC ISOLATOR FOR CURRENT LOOP WITH HIGH ISOLATION

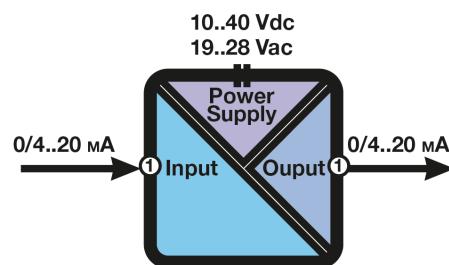

Z109S-DI is a device that allows to isolate and convert a 0/4 - 20 mA signals. The device can power also all 2-wire sensors providing a stabilized voltage of 20 V and a max current of 20 mA with short-circuit protection. A 3-way galvanic isolation of 3.500 Vac among Power supply // input // output circuits assures the integrity of your data.

TECHNICAL SPECIFICATION

GENERAL DATA

| | |
|---|--|
| Power supply | 10..40 Vdc; 19..28 Vac |
| Power consumption | 2,5 W |
| Power transducers | Active input 2 wire (20 Vdc) |
| Isolation | 3,5 kVac (3 way) |
| Insulation | Safety insulation < 300 V~ referred to ground CAT II |
| Input protection: | 30 V continuously. |
| Protection Output / Power supply | Against surge pulses 400 W/ms |
| Status Indicators | Power |
| Response time | < 200 µs |
| Cutoff frequency | 6 kHz |
| Errors referred to Input's measure range: | Calibration 0,2% - 10 µA Thermal coeff. 0,02%/K EMI < 1% |
| Protection degree | IP20 |
| Operating Temperature | -20..+60°C |
| Weight | 200 g |
| Dimension | 100 x 112 x 18 mm |
| Enclosure | PBT, black color |
| Connessioni | Removable 3-way screw terminals |
| Mounting | DIN rail guide 35 mm |

INPUT

| | |
|-----------------|--|
| Channel numbers | 1 (active / passive) |
| Type | Current 0 - 20 mA or 4 - 20 mA, 20 V~ stabilized loop supply, input impedance ~ 50 Ω |


OUTPUT

| | |
|-----------------|---------------------------------------|
| Channel numbers | 1 (active / passive) |
| Type | Current, 0/4..20 mA Max load 600 Ω |

STANDARD

| | |
|----------|--|
| Approval | CE |
| Norms | EN 61010-1 EN 61000-6-2 EN 61000-6-4 |
| | |

APPLICATION NOTE

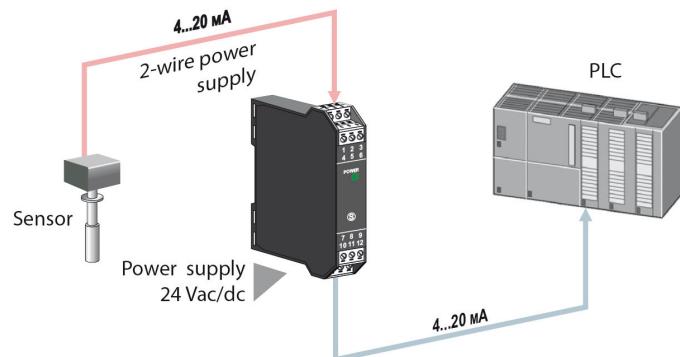

ORDER CODES

| Code | Description |
|----------|--|
| Z109S-DI | Galvanic isolator for current loop with high isolation |
| Z-SUPPLY | Single-phase switching power supply 24V @ 1.5A |



Via Austria, 26 • 35127 Padova - (I) - Tel. +39 049 87.05.359
Fax +39 049 87.06.287 • www.seneca.it • info@seneca.it

The material in this document is for information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, SENECA assumes no liability resulting from errors or omissions, or from the use of the information contained herein.