

# eX715M | Web HMI - Tech Note

## 15.6" TFT Rugged Industrial Web-based HMI

- Chromium based HTML5 Browser
- Easy to use browser setting application
- 15.6" TFT color display, resolution 1366x768 pixel
- Projected capacitive touchscreen. True glass design. Multitouch operation
- Operating Temperature -20°C to +60°C
- IECEx, ATEX, DNV-GL, cULus, cULus: Class 1 Div 2




## Highlights

eX700M Web HMI products combine state-of-the-art connectivity features and top browsing performance in a great design. They are the ideal choice for all demanding IoT edge applications in factory, marine and building automation where powerful and performing HTML5 web browser is needed.



The glass projected capacitive touchscreen and the brilliant 15.6 widescreen display with resolution of 1366x768 guarantee great optical performance; with the support of multitouch gesture programming they can create the most natural human interfaces.

eX700M Web HMI products include a Chromium based HTML5 browser supporting kiosk mode operation. Supports Corvina Cloud secure connectivity with full network separation.

# eX715M Technical Data

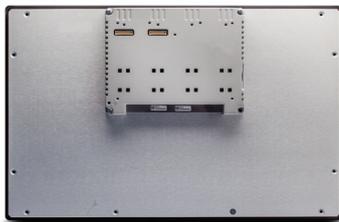

<b>System Resources</b>	
Display - Colors	15.6 TFT LED - 16M
Resolution	1366x768, HD
Brightness	400 cd/m <sup>2</sup>
Dimming	Yes
Touchscreen	True Glass Projected Capacitive, Multitouch
CPU	64-bit RISC quad core - 1.6GHz
Operating System	Linux
Flash	4 GB
RAM	2 GB
FRAM	64 KB
Real Time Clock, RTC Back-up	Yes
<b>Interface</b>	
Ethernet port	3 (port 0 - 10/100/1000, port 1 - 10/100, port 2 - 10/100)
USB port	2 (Host V2.0, max. 500 mA)
Serial port	1 (RS-232, RS-485, RS-422, software configurable) Max 3 serial ports using plug-in modules.
SD card	Yes
Buzzer	Yes
Expansion	2 slot for plug in modules
<b>Ratings</b>	
Power supply	24 Vdc (10 to 32 Vdc)
Current Consumption	1.2 A at 24 Vdc (max.)
Battery	Rechargeable Lithium battery, not user-replaceable
Input Protection	Electronic
<b>Environment Conditions</b>	
Operating Temperature	-20° to +60 °C (vertical installation) Plug-in modules and USB devices may limit max temperature to +50 °C
Storage Temperature	-20°C to +70°C
Operating / Storage Humidity	5-85% RH, non condensing
Protection Class	IP66 (front), IP20 (rear) Type: 12, 4X
Operating Height	0 to 2000 m
<b>Dimensions and Weights</b>	
Faceplate LxH	422x267 mm (16.6x10.5)
Cutout AxB	411x256 mm (16.18x10)
Depth D+T	56+8 mm (2.20+0.33)
Weight	4.1 Kg
<b>Approvals</b>	
CE	Emission EN 61000-6-4, Immunity EN 61000-6-2 for installation in industrial environments
UL	cULus: UL61010-1 / UL61010-2-201
UL	cULus: Class 1 Div 2
IECEX	Zone 2/22: Ex nA IIC T5 Gc, Ex tc IIIC T95°C Dc
ATEX	Zone 2/22: II 3 G Ex nA IIC T5 Gc, II 3 D Ex tc IIIC T95°C Dc
DNV	Yes

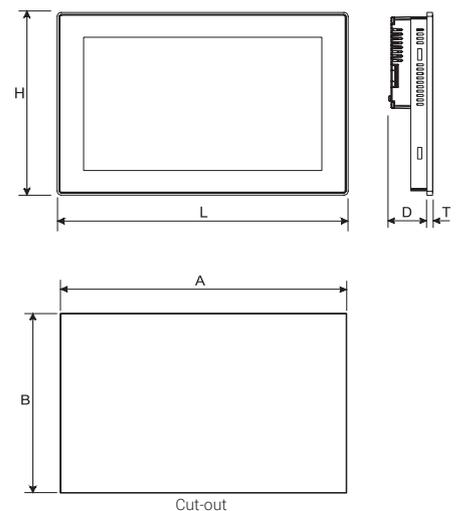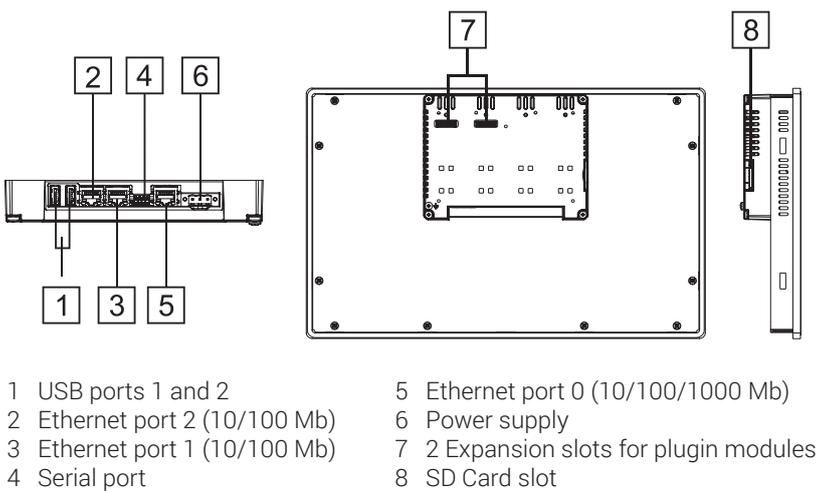

## Ordering Information

Model	Part Number	Description
eX715M	+EX715MU5PW	Web HMI - 15.6 widescreen TFT color with multitouch projected capacitive touchscreen. 3 Ethernet ports, 1 serial port, 2 USB ports.